




***Ergonomically designed
handheld RFID reader
delivers the highest
ruggedness and
functionality
in a wide range of
environments***

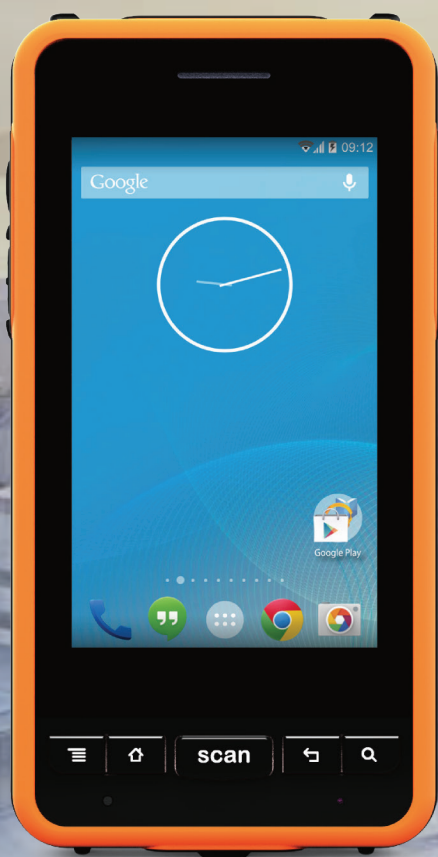

AT911N

Access Control, Traffic Police, & Flower Container

Series Highlights:

- Android 4.2 (Jelly Bean)
- Dual-Core 1.0GHz
- Memory 1GB RAM / 8GB ROM
- RFID UHF GEN2, ISO/IEC 18000-6C/6B (Option)
- RFID HF 13.56MHz NFC, ISO15693, MIFARE, ISO14443 A/B
- 1D or 2D Barcode Scanner
- WLAN (802.11 a/b/g/n Compliant)
- Bluetooth Class II, v2.1 + EDR
- Camera with Flash
- GPS + Glonass

Tel: +82-70-7012-1317

www.alienasia.com | support@alienasia.com

| AlienTechnology Asia YouTube



AT911N Specification

PERFORMANCE CHARACTERISTICS

Processor	Dual - Core 1.0 GHz
Operating System	Android Jelly Bean v.4.2
Memory	1GB RAM / 8GB ROM

PHYSICAL CHARACTERISTICS

Dimensions (W x L x H)	75 x 145 x 27 (31.5) mm
Weight	270g (PDA only, without battery)
Display	4" WVGA with IPS TFT LCD, 480Wx800L with Backlight Capacitive Touch Screen
Power	3.7V 2,200mAh Lithium-Ion battery (Rechargeable) Input AC100V ~ 240V / Output DC 5V 2A Power Adapter
Standard I/O Port	USB 2.0 Client
Expansion Slot	1Micro SD Slot (SDHC), 1SIM Slot
Audio	Phone Receiver, Speaker, Ear Jack, Microphone

DATA CAPTURE

Barcode	1D or 2D Barcode Scanner
Camera	CMOS 5Mp. Auto Focus with Flash
RFID (UHF)	Frequency : CE 865MHz ~ 868MHz FCC 902MHz ~ 928MHz Reading range : 0M ~ 5M (According to Tag & Environment) Writing range : 0M ~ 0.5M (According to Tag & Environment) RF output : 1W (MAX) Protocol : GEN2, ISO / IEC 18000-6C / 6B (Option) Special function : Anti - Collision
RFID (HF 13.56MHz)	Applied RFID Tag : NFC, ISO15693, MIFARE, ISO14443 A/B Reading range : According to Tag 0Cm ~ 5Cm (Internal)

WIRELESS COMMUNICATION

WLAN	802.11 a/b/g/n Compliant
Bluetooth	Bluetooth Class II, v2.1 + EDR
Radio	MODEM 3G (GSM / GPRS / EDGE / WCDMA / HSPA+)
GPS	Internal Antenna (GPS + Glonass)

INTERACTIVE SENSOR TECHNOLOGY

Sensor	3D Digital Linear Acceleration Sensor and 3D Digital Magnetic Sensor
--------	---

USER ENVIRONMENT

Operating temperature	-10℃ to 60℃
Storage temperature	-30℃ to 70℃
Charging temperature	-0℃ to 45℃
Humidity	95% non - condensing
Drop Specification	1.5M Drop to concrete
Dust & Water Proof	IP65

ADDITIONAL FEATURES

Notification	Vibrator and LED, Speaker
--------------	---------------------------

ACCESSORIES(OPTION)


Gun Handle Grip (Pistol Grip)	Body, UHF / HF Available
Gun Handle Battery	Lithium-Ion 3.7V 5,200mAh (Rechargeable) Option

* All Features and specifications described are subject to change without notice.

ACCESSORIES



Adapter
AC Cable



Protection
Film



USB Cable



Handstrap

OPTION



GUN Handle



Battery
Charger